

# 1000A LARGE SPLIT CORE CURRENT TRANSFORMER



Split-core current transformers provide linear output voltage that is directly proportional to the input current. These transformers are safely and easily installed over existing electrical power lines without disconnecting the lines or interrupting service.

DENT's energy monitoring components are used for a variety of applications including building automation, tenant submetering, performance verification, energy management, and new technology assessment.



Intertek  
3101607



## KEY SPECIFICATIONS

<b>Window Size</b>	2.0" (5.1 cm)
<b>Current Range</b>	20 - 1300A AC
<b>Output</b>	333 mV at rated current
<b>Ratio Error</b>	<1% at rated current (typical)
<b>Phase Error</b>	<2° at rated current (typical)

## ELECTRICAL

Output	333 mV at rated current
Wire Polarity	White = Hi, positive (+) Black = Low, negative (-)
Frequency Range	50 to 400 Hz

## MECHANICAL

Case Material	Epoxy encapsulated housing
Leads	2.7 M (8'), twisted pair, 20 AWG
Operating Temperature	-20° to 55°C (-4° to 131°F)

## SAFETY

Working Voltage	600 VAC, Category III
Dielectric Strength	5000 VAC around case 600V rated leads
Certification	Conforms to: UL STD 61010-1 EN 60044-1 Certified to: CAN/CSA STD C22.2 No. 61010-1



## PART NUMBERS


CT-SCL-1000-U/B	1000A Large Split Core
-----------------	------------------------

## CONTACT US

DENT Instruments, Inc.  
Energy & Power Measurement Solutions

925 SW EMKAY DRIVE  
BEND, OREGON 97702 USA  
541.388.4774 | 800.388.0770  
WWW.DENTINSTRUMENTS.COM

DENT P/N	NOMINAL RATING (Amps)	USEFUL CURRENT RANGE (Amps)	DIMENSIONS				
			A	B	C	D	E
CT-SCL-1000	1000	20 - 1300	12.07 cm (4.8")	12.70 cm (5.0")	3.05 cm (1.2")	5.1 cm (2.0")	5.08 cm (2.0")

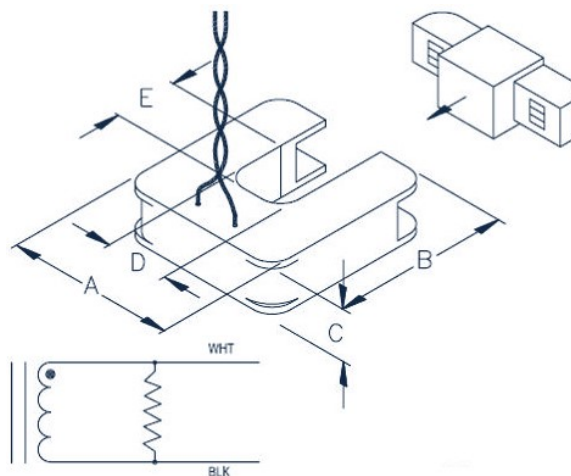

All specifications contained in this document are subject to change without notice.  
© DENT INSTRUMENTS, INC.  
rev071219