

# 5/20/50/100A REVENUE GRADE TOROIDAL SOLID CORE CURRENT TRANSFORMERS



DENT's Revenue Grade toroidal current transformers are designed for applications where an AC current signal must be transformed into a millivolt signal appropriate for micro-processor based circuits.

This series of CTs is designed specifically for integration into products which require exceptionally accurate signal transformation with low phase shift while exposed to harsh environmental operating conditions.

## KEY SPECIFICATIONS

Window Size	0.5" (12.8mm)
Current Range*	5A Model: 0.05 - 10A AC 20A Model: 0.2—40A AC 50A Model: 0.5 - 100A AC 100A Model: 1.0—200A AC
Output	333.3 mV at rated current
Ratio Error	+/-0.2% at rated current (typical)
Phase Error	<0.2°
Accuracy Class <sup>1</sup>	IEC 61869-2 Class 0.2 IEEE C57.13 Class 0.3

\* Depending on meter compatibility. See ELITEpro™ and PowerScout™ specifications for details.

## ELECTRICAL

Output	333.3 mV at rated current
Wire Polarity	White = Hi, positive (+) Black = Low, negative (-)
Frequency Range	50 to 400 Hz

## MECHANICAL

Case Material	PBT resin, UL 94V-0, epoxy encapsulated
Leads [if equipped]	2.4 M (8'), twisted pair, 24 AWG, 600V rated
Operating Temperature	-25°C to 85°C (-13°F to 185°F)

## SAFETY


Working Voltage	600 VAC, Category III
Dielectric Strength	5400 VAC
Certification	Conforms to: UL STD 61010-1 EN 60044-1 Certified to: CAN/CSA STD C22.2 No. 61010-1



## CONTACT US

**DENT Instruments, Inc.**  
Energy & Power Measurement Solutions  
An ISO 9001:2008 Certified Company


925 SW EMKAY DRIVE  
BEND, OREGON 97702 USA  
541.388.4774 | 800.388.0770  
WWW.DENTINSTRUMENTS.COM

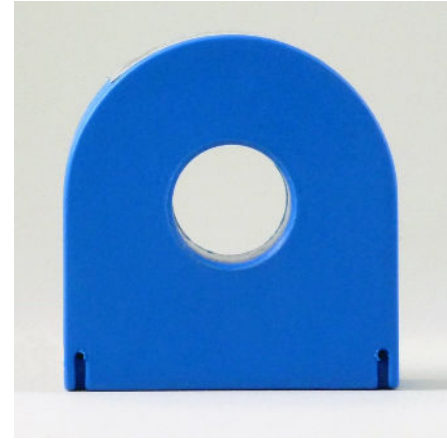


UL  
E186827



## Outline Drawing with Lead Wires

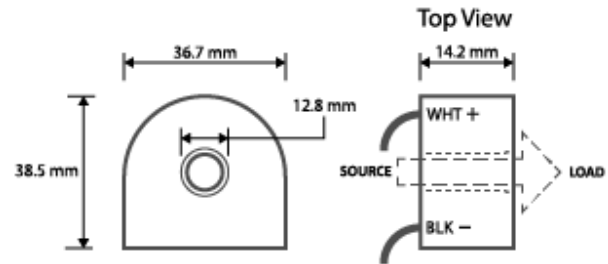

## Outline Drawing with PCB/Pin Mounting

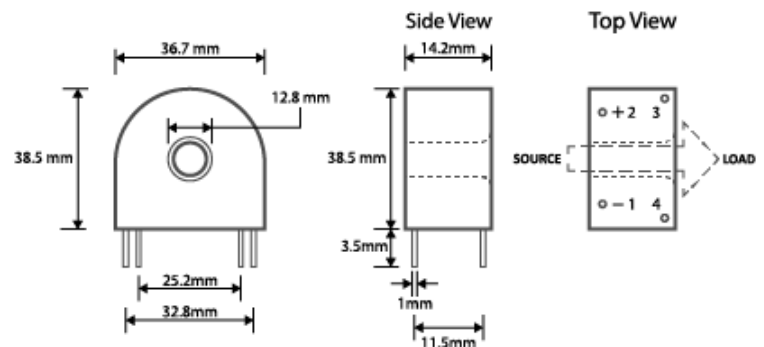

## PART NUMBERS<sup>2</sup>

CT-RGT12-0005-U/P	5A Revenue Grade Solid Core
CT-RGT12-0020-U/P	20A Revenue Grade Solid Core
CT-RGT12-0050-U/P	50A Revenue Grade Solid Core
CT-RGT12-0100-U/P	100A Revenue Grade Solid Core

<sup>1</sup> When CT phase shift is set as follows: 5A = 0.0°, 20A = 0.0°, 50A = 0.0°, 100A = 0.0°

<sup>2</sup> U = Unterminated (with ferrules), P = Pins