

# 100/200/600A MEDIUM SPLIT CORE CURRENT TRANSFORMERS

Split-core current transformers provide linear output voltage that is directly proportional to the input current. These transformers are safely and easily installed over existing electrical power lines without disconnecting the lines or interrupting service.

DENT's energy monitoring components are used for a variety of applications including building automation, tenant submetering, performance verification, energy management, and new technology assessment.

## KEY SPECIFICATIONS

Window Size	1.25" (3.20 cm)
Current Range	100A Model: 5 - 130A AC 200A Model: 4 - 260A AC 600A Model: 12 - 780A AC
Output	333 mV at rated current
Ratio Error*	<1% at rated current (typical)
Phase Error*	<2° at rated current (typical)

## ELECTRICAL

Output	333 mV at rated current
Wire Polarity	White = Hi, positive (+) Black = Low, negative (-)
Frequency Range	50 to 400 Hz

## MECHANICAL

Case Material	Epoxy encapsulated housing
Leads	3 M (9.8'), twisted pair, 20 AWG
Operating Temperature	-20° to 55°C (-4° to 131°F)

## SAFETY

Working Voltage	600 VAC, Category III
Dielectric Strength	5000 VAC around case 600V rated leads
Certification	Conforms to: UL STD 61010-1 EN 60044-1 Certified to: CAN/CSA STD C22.2 No. 61010-1




## CONTACT US

DENT Instruments, Inc.  
Energy & Power Measurement Solutions  
An ISO 9001:2008 Certified Company

925 SW EMKAY DRIVE  
BEND, OREGON 97702 USA  
541.388.4774 | 800.388.0770  
WWW.DENTINSTRUMENTS.COM



DENT P/N	NOMINAL RATING (Amps)	USEFUL CURRENT RANGE (Amps)	DIMENSIONS				
			A	B	C	D	E
CT-SCM-0100	100	5 - 130A AC	8.26	8.51	2.54	3.18	3.18
CT-SCM-0200	200	4 - 260A AC	cm	cm	cm	cm	cm
CT-SCM-0600	600	12 - 780A AC	(3.25")	(3.35")	(1.00")	(1.25")	(1.25")

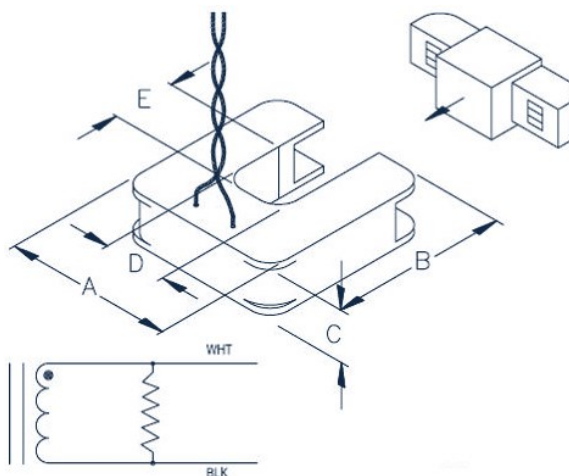

## PART NUMBERS

CT-SCM-0100-U	100A Medium Split Core
CT-SCM-0200-U	200A Medium Split Core
CT-SCM-0600-U	600A Medium Split Core

All specifications contained in this document are subject to change without notice.  
© DENT INSTRUMENTS, INC.  
rev031119