

# POWERSCOUT™ 3 HD

## NETWORKED 3-PHASE METER

REVENUE GRADE INSTRUMENTS FOR SUPERIOR ENERGY MEASUREMENT

3  
channels



DIN Rail Enclosure Pictured (PS3HD-R-D-N). Wall Mount Enclosure (PS3HD-C-D-N) is also available.



## APPLICATIONS

- Tenant Submetering
- Bi-directional Metering
- Data Centers
- Real-Time Power Monitoring in Commercial, Retail, and Industrial environments

## MAINS MONITORING

The PowerScout 3 HD is the final model in the HD family replacing the PowerScout 3037 as DENT Instruments' 3-channel 3-phase meter. The PS3HD brings increased measurement performance and communication options in a single SKU. It can utilize any of DENT's internally shunted, 333 mV output split-core or RōCoil CTs. Monitor a single three phase load or network with other PowerScout HD meters to monitor several loads across your facility.

## REVENUE-GRADE PERFORMANCE

With high speed continuous sampling, data updates rate of 1 Hz and ANSI C12.20-2015 Class 0.2 revenue grade accuracy (depending on CT), the PowerScout 3 HD is well-suited for accountability metering in commercial, retail, and industrial facilities including demand response and tenant submetering.

## LINE OR USB POWERED

PowerScout 3 HD instruments are line-powered with an internal wide-range power supply, allowing line-to-line voltages from 90-600 VAC. For convenience, the PS3HD also includes a USB (Type C) connector which allows the meter to be powered from a host PC or laptop computer during configuration.

## INDUSTRY-STANDARD MODBUS OR BACNET

The PowerScout 3 HD supports both Modbus (based on SunSpec IEEE-754) and BACnet communications protocols. Communications interface can be accomplished through serial RS-485 or Ethernet using either Modbus RTU, BACnet MS/TP, Modbus TCP, or BACnet IP protocols.

## TWO AVAILABLE CONFIGURATIONS

The PowerScout 3 HD is available in a compact enclosure to facilitate mounting in the UL-approved enclosure of your choice using DIN rail or in a wall-mount enclosure that's ready to be installed near your panel or switch gear.

## QUICK SETUP

The PowerScout 3 HD can be configured using one of two interfaces: PC Application ViewPoint HD or Web Browser. Configurations can be saved to a template for re-use. Use the on-board LCD and thumb wheel to verify setup.

## POWERFUL TROUBLESHOOTING

The PowerScout 3 HD meter includes DENT's patented\* PhaseChek™ circuitry for identifying mis-phased and backwards CTs. When used in conjunction with ViewPoint HD, advanced analytics are available including waveform visualization, vector polar plotting and harmonic distortion analysis.

## FEATURES

- 3 channels: 3-phase submeter monitors voltage, current, power, energy, and many other electrical parameters on single or three-phase systems
- Two models available: DIN Rail Mount Enclosure or Wall Mount Enclosure
- Revenue grade. ANSI C12.20-2015 Class 0.2 certification
- Interval Data Recording: Store up to 63 days of 15-minute kWh data
- Continuous sampling; no blind cycles.
- Use with a full range of DENT Split Core or RōCoil® Rogowski-style CTs, including several revenue-grade options
- Line-Powered: 90-600V Phase-to-Phase Power Supply
- Display shows real-time information about the meter configuration and metered data
- Communicate using either BACnet or Modbus protocol
- User-configurable alarm with isolated output
- Data updates occur every 1.0 seconds
- Patented PhaseChek™ technology confirms proper CT orientation
- UL Listed, CE Mark, BTL Certification

# POWERSCOUT™ 3 HD SPECIFICATIONS

TECHNICAL	
SERVICE TYPE	Single Phase, Three Phase-Four Wire (WYE), Three Phase-Three Wire (Delta)
POWER	From L1 Phase to L2 Phase. 90-600VAC RMS CAT III 50/60 Hz, 500 mA AC Max
AC PROTECTION	0.5 A internal fuse protection. 200 KA interrupt.
VOLTAGE CHANNELS	80-346 Volts AC Line-to-Neutral, 600 V Line-to-Line, CAT III.
CURRENT CHANNELS	3 channels, 0.525 VAC max, 333 mV CTs, 0-4,000+ Amps depending on CT
MAXIMUM CURRENT INPUT	150% of current transducer rating (mV CTs) to maintain accuracy. Measure up to 4000 A with RøCoil CTs
MEASUREMENT TYPE	True RMS using high-speed digital signal processing (DSP)
LINE FREQUENCY	50/60 Hz
SAMPLING	Continuous 1.8 kHz (no blind cycles)
PARAMETER UPDATE RATE	1.0 second
MEASUREMENTS	Volts, Amps, kW, kVAR, kVA, aPF, dPF, kW demand, kVA demand, Import (Received) kWh, Export (Delivered) kWh, Net kWh, Import (Received) kVAh, Export (Delivered) kVAh, Net kVAh, Import (Received) kVARh, Export (Delivered) kVARh, Net kVARh, THD, Theta, Frequency. All parameters for each phase and element total
ACCURACY	0.2% ANSI C12.20-2015 Class 0.2
RESOLUTION	32-bit floating point
DISPLAY	2 x 16-character display with tri-color backlight
ALARM OUTPUT	Undervoltage (open collector- 30VDC Max.)

COMMUNICATIONS	
HARDWARE	RS-485 Serial and Ethernet
MAX COMMUNICATION LENGTH	1200 meters at 100K bits/second or less
COMMUNICATION RATE (BAUD)	Modbus: 9600, 19200, 38400, 57600, 76800, 115200 baud BACnet: 9600, 19200, 38400, 76800
DATA BITS	8
PARITY	None, Even, Odd
STOP BIT	2, 1
SUPPORTED PROTOCOLS	Modbus RTU, BACnet MS/TP, Modbus TCP or BACnet IP

MECHANICAL	
WIRE CONNECTIONS	12-28 AWG 600 VAC, Voltage connection must be #14 AWG or larger & 600 VAC rated
MOUNTING	Wall mount enclosure or TS35/7.5 DIN Rail
OPERATING TEMPERATURE	-20° to 60°C (-4° to 140°F)
HUMIDITY	5% to 95% non-condensing
ENCLOSURE	ABS Plastic, 94-VO flammability rating
ENCLOSURE DIMENSIONS	<b>DIN Rail Version</b> (L) 19.08cm x (W) 8.23cm x (H) 3.76cm (7.51" x 3.24" x 1.48") <b>Wall Mount Version</b> (L) 25.70cm x (W) 14.00cm x (H) 5.37cm (10.12" x 5.50" x 2.12")
WEIGHT (APPROXIMATE)	<b>DIN Rail Version</b> 363 g (13 ounces), exclusive of CTs. <b>Wall Mount Version</b> 635 g (22 ounces), exclusive of CTs

CERTIFICATIONS	
UL LISTED	Conforms to UL Std 61010-1, 3rd Edition & IEC 61010-2-030 1st Edition
CE	LVD (EN61010-1), EMC (EN61326-1), RoHS 2 (EN50581)
ANSI C12.20 CLASS 0.2	NIST Traceable Calibration



VIEWPOINT HD SOFTWARE	
OPERATING SYSTEM	Windows® 11, Windows® 10, Windows® 8, Windows® 7
COMMUNICATIONS	10/100 Ethernet and USB 2.0
WEB PAGE SECURITY	2 levels of PIN protection (Read/Write or Read-Only)

ORDERING PART NUMBERS	
PS3HD-R-D-N	POWERSCOUT 3 HD, DIN Rail Mount Enclosure with Display
PS3HD-C-D-N	POWERSCOUT 3 HD, Wall Mount Enclosure with Display
PS3HD-R-D-N-C	POWERSCOUT 3 HD, DIN Rail Mount Enclosure with Display, CW&M OPTION
PS3HD-C-D-N-C	POWERSCOUT 3 HD, Wall Mount Enclosure with Display, CW&M OPTION


\*At -20°C, LCD display could be illegible. Meter voltage @ -20°C must exceed 100 VAC to power the meter.  
\*\*Colder temperatures require higher voltage to power the meter.

# POWERSCOUT™ 3 HD ANATOMY

## TWO AVAILABLE CONFIGURATIONS

Available to be mounted in the external enclosure of your choice or as a self-contained wall-mounted enclosure option.

DIN RAIL MOUNT ENCLOSURE  
PS3HD-R-D-N

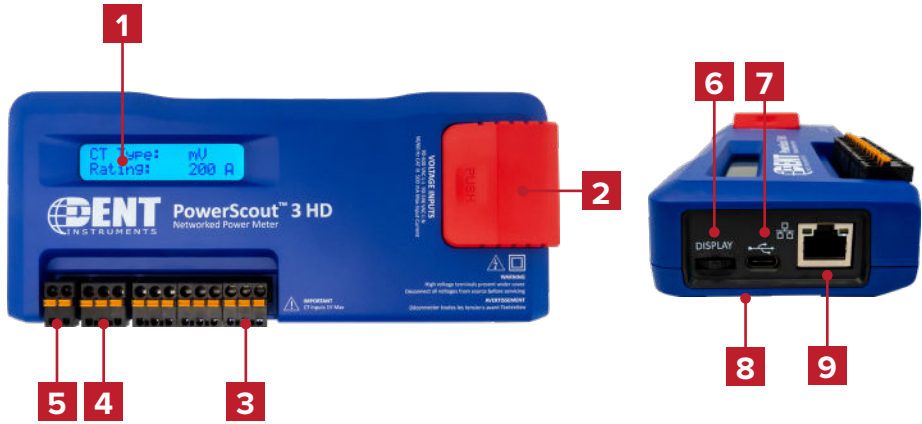


- 1. Display
- 2. High Voltage Cover
- 3. CT Connections (x3)
- 4. Serial RS-485
- 5. Alarm
- 6. Thumb Wheel for Menu Navigation
- 7. USB-C
- 8. DIN Rail Channel
- 9. Ethernet Port

WALL MOUNT ENCLOSURE  
PS3HD-C-D-N



- 10. 0.5" Conduit Connection (x3)
- 11. Wall Mount Enclosure Top
- 12. Mounting Holes
- 13. PS3HD Circuit Board
- 14. Voltage Connection
- 15. High Voltage Cover (transparent in photo)

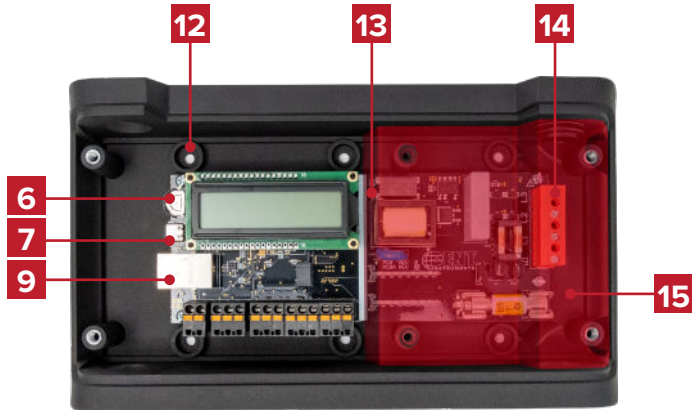

DISTRIBUTOR:  
PLACE CONTACT INFO HERE



**DENT Instruments, Inc.**  
Energy & Power Measurement Solutions  
An ISO 9001:2015 Certified Company  
925 SW EMKAY DRIVE  
BEND, OREGON 97702 USA  
541.388.4774 | 800.388.0770  
[www.DENTinstruments.com](http://www.DENTinstruments.com)